

The ELAFLEX CNG Refuelling System –

proven quality and maximum safety

You can now enjoy all the usual ELAFLEX benefits – fast delivery from our warehouse, customer-friendly operation and uncompromising safety – for your existing and new CNG refuelling customers. You also benefit from practice-orientated handling, repair- and maintenance-friendly design and a convincing price-performance ratio.



CNG
Vehicle Receptacle



Separated SB-CNG
(Safety Break)



We offer you durable refuelling accessories for CNG dispensers for operating temperatures from $-40\text{ }^{\circ}\text{C}$ to $+65\text{ }^{\circ}\text{C}$ ($-40\text{ }^{\circ}\text{F}$ to $+149\text{ }^{\circ}\text{F}$), which ensure the best flow rates and maximum pressure safety under a wide range of conditions. You already know and appreciate our proven refuelling products – You can rely on ELAFLEX for CNG too.

Our N-CNG refuelling valve is suitable for NGV1 or ISO 14469 petrol stations and is available for nominal operating pressures of P30 (207 bar/3000 psi) or P36 (250 bar/3600 psi).



N-CNG
(Nozzle)

Yellow = US Standard
250 bar / 3.600 psi



Blue = EU Standard
207 bar / 3.000 psi




N-CNG
with Hose Line



N-CNG
Nozzle

SB-CNG
(Safety Break)

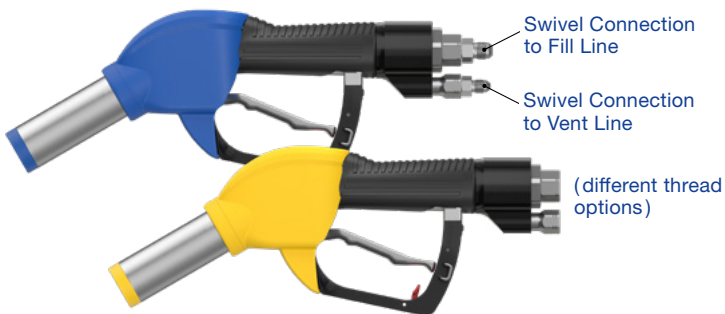

Swivel Connection
to Fill Line

Swivel Connection
to Vent Line

(different thread
options)

Advantages of our CNG components

- High-quality refuelling products with the highest flow rates
- Safe and easy to use
- Also available as a tested complete set:
Dispensing valve | Breakaway coupling | Hose line
- Short lead times, fast delivery from stock
- Sustainability on principle:
Longevity | easy maintenance | reparability
- Known and proven ELAFLEX quality for CNG refuelling



Samples

Accessories

- Scuffguard (EA 957) in different colours
- Customised Nozzle Talkers (EK 024 CNG)

ELAFLEX HIBY GmbH & Co. KG

Schnackenburgallee 121 · 22525 Hamburg (Germany)
Tel. + 49 40 540005-0 · info@elaflex.de · www.elaflex.de